


SYH-2R

Resistive Humidity Sensor

Features

- ◆ Wide range of applications
- ◆ Excellent Reliability
- ◆ Water proof
- ◆ RoHS Compliant
- ◆ Interchangeability

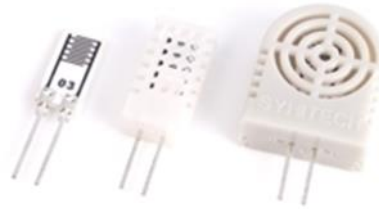

Product Summary

Resistance type humidity sensor: SYH-2R offers cost effective and convenient humidity measurement.

While maintaining the attractive features such as no-calibration requirement and high Interchangeability of resistive type humidity sensor :

SYH-2R widens the scope of applications to home appliances, HVAC, and automotive.

Coated with patented polymer, SYH-2R can be used in demanding environments (-20°C~85°C) with frequent condensing and chemical vapors.

SYH-2R can be directly connected to μ -com with ADC or RFC converting resistance changes to either voltage or frequency. It can also be modularized to voltage output with oscillator.

SYH-2R is field proven for many years of application by world leading brands of smart appliances, air-conditioners, and refrigerators.

Application


Energy Saving HVAC Control

Air Conditioning, Refrigeration, IAQ monitoring, Vent Fans, Home Appliances, Humi / Dehumidifiers

Process Control & Instrumentations

Medical Instruments, Handheld Devices, Weather Stations, Food Processing, Printers, RFID

Dimensions

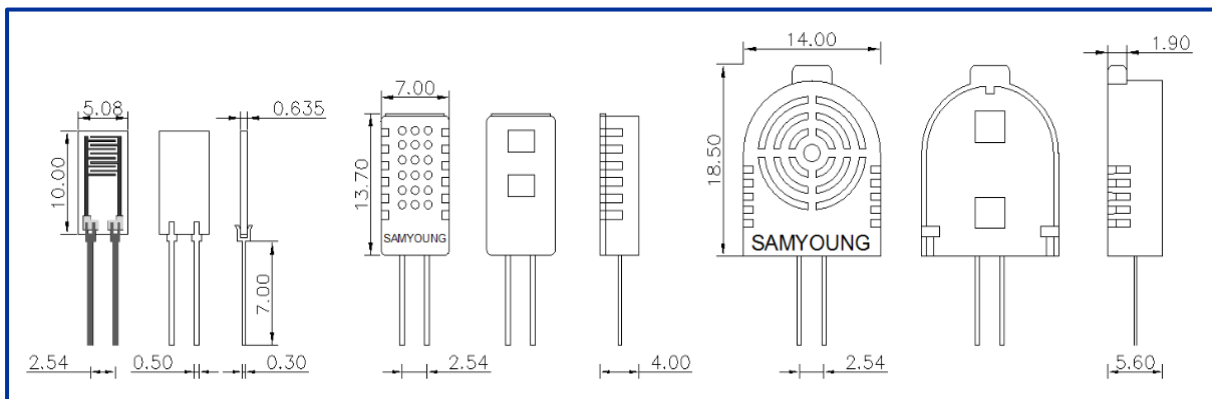

* The tolerance is in compliance with control standard of supplier.

Sensor Performance

Electrical Characteristics

	Min	Spec	Max
Rated voltage (V_{RMS})		1	5
Rated power (mW)		0.26	
Standard characteristics (k Ω)		33	
Operating temperature ($^{\circ}C$)	-20		85
Operating humidity (%RH)	10		95
Operating Frequency (kHz)	0.1		10
Storage temperature ($^{\circ}C$)	-20		85
Storage humidity (%RH)			95
Accuracy (%RH) ¹	-3		3
Hysteresis (%RH)	-2		2
Response time (T_{80} , sec.) ²			45
Temperature coefficient (%RH/ $^{\circ}C$)		-0.5	

1. Accuracies measured at 25 $^{\circ}C$, 60%RH, 1.0V_{RMS}, 1kHz
2. Measured at 25 $^{\circ}C$, 1m/sec airflow for achieving 80% of step from 30%RH to 90%RH


Reliability

Test	Condition
HTS	85 $^{\circ}C$, 1,000 hrs
LTS	-20 $^{\circ}C$, 1,000 hrs
THB	85 $^{\circ}C$, 85%RH, 1,000 hrs, Bias
HC	30 \leftrightarrow 90%RH, 25 $^{\circ}C$, 100 times
TC	-20 \leftrightarrow 85 $^{\circ}C$, 100 times
Organic solvent	Benzene, Xylene, Toluene, 300hrs
M/C(drop)	100cm drop, 3 times
Vibration	X-Y-Z, 10~55Hz, 2hrs
Soldering heat	260 \pm 5 $^{\circ}C$, 3 sec.
Tensile	500g(4.9N), 10 sec.


※ Pass Criteria

1. The Resistance Characteristics change from the initial value of each test sample should be less than \pm 5%RH at 25 $^{\circ}C$, 60%RH
2. No extraordinary changes of the sensor i.e. Electrode migration, polymer evaporation, color, breakdown, crack etc.

Operating Temperature-Humidity Range

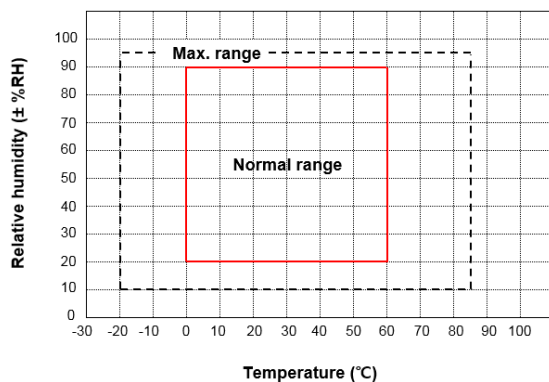


Standard Characteristics

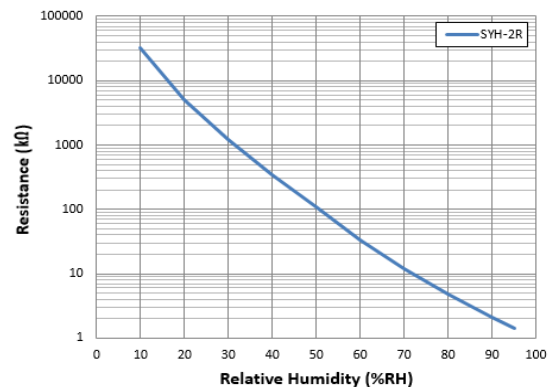


Product Measuring System

LCR meter	HIOKI 3532-50
Chamber	PDR-3J
Hygrometer	DEW MASTER


Temperature Characteristics

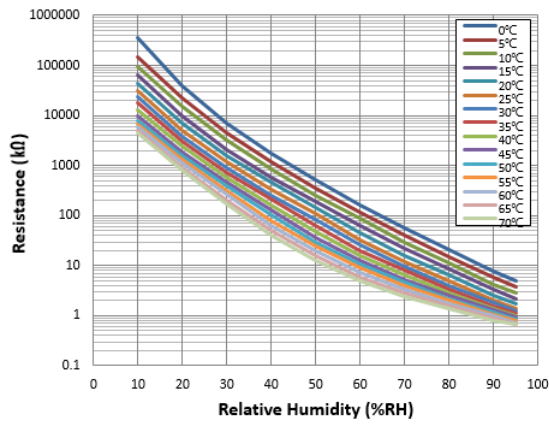

Frequency Characteristics

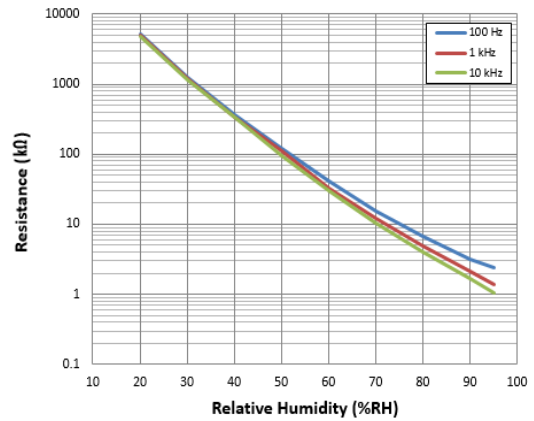

Part Number

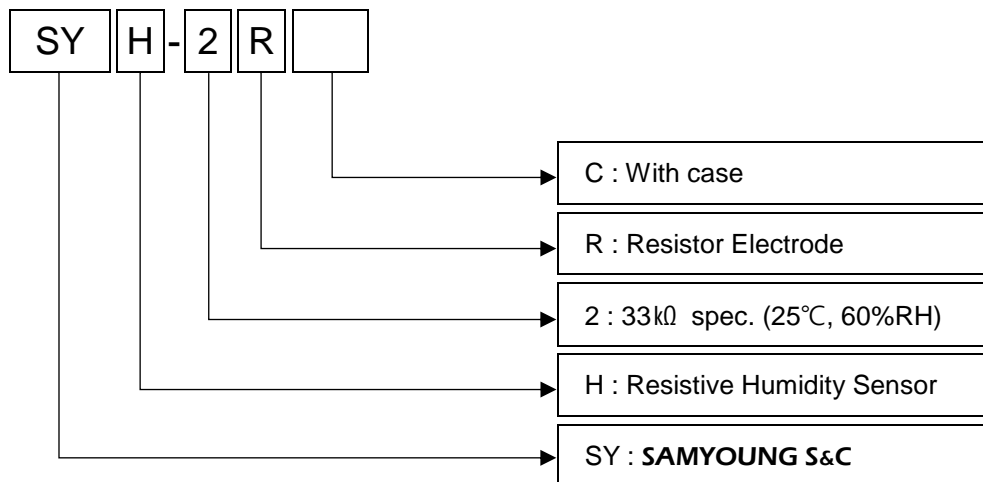

Packaging

Tray : 50pcs (PET, 190×140×6mm)/ SYH-2R

Vinyl Pouch : 100pcs / SYH-2R C

Inlet Box

SYH-2R : 200×145×75mm / 20 trays / 0.62Kg(approx.)

SYH-2R C : 280×280×55mm / 10 pouches / 1.2Kg(approx.)

Outlet Box (650×360×310mm)

SYH-2R : 23 Inlet boxes / 14.5Kg (approx.)

SYH-2R C : 12 Inlet boxes / 14.5Kg (approx.)

Revision History

Date	Version	Page(s)	Changes
	1.0		First Release
09 Sep 2016	2.0	ALL	Modified dimension, reliability chart, and P/N instruction
16 Dec 2016	2.1	1	Lead pin tolerance



This publication is the proprietary product of **SAMYOUNG S&C** and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of **SAMYOUNG S&C**. Express written permission is also required before a third party may make any use of this publication.

SAMYOUNG S&C Co., Ltd.

150 Sangdaewon-dong, Jungwon-gu,
Seongnam-city, Gyeonggi-do,
KOREA 462-807

Phone : + 82 31 741-1830
Fax : + 82 31 741-1821
Homepage : www.samyongsnc.com
E-mail : sales@samyongsnc.com

SAMYOUNG S&C reserve the rights, without further notice, to change the product specifications and/or the information in this document.

Copyright 2012©, **SAMYOUNG S&C**